neofeu

RETRACTABLE TYPE FALL ARRESTER WITH RESCUE WINCH

REF.
NS15TS /20TS /30TS

neofeu.com

FALL PROTECTION ONLY*
*Un seul métier, l'antichute

CERTIFICATION : **EN 360 : 2002 - EN 1496 : 2017 CLASS A** / REGULATION : **2016 / 425**
SHEET : **VG11 11.062**

TESTED
140 KG

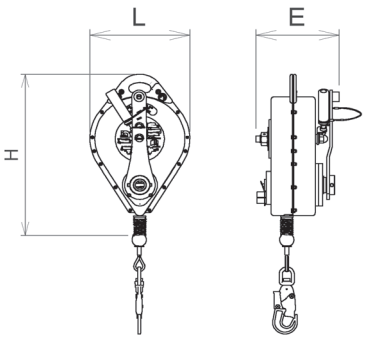

DIMENSIONS (ON TABLE)

TECHNICAL SPECIFICATIONS

- Maxi user weight 140 kg
- Galvanized cable Ø 4,5 mm (R > 12 kN)
- Epoxy painted steel housing
- Locking speed : 20 m/mn
- Static resistance : > 12 kN
- Arrest force : < 600 daN
- Vertical minimum clearance : 2,5 m
- Recovery function is activated by ¼ turn knurled knob
- Recovery indicator
- Swivel snap hook opening 20 mm ref. : NM18LFT
- Temperature of use : -30° C to +50° C

USE

Works on height with vertical fall hazard. Particulary adapted for confined spaces : shafts, silos, sewers ...
Directly suitable for tripods fitted with fixing plate.

DESCRIPTION

Fall arrester fitted with a self retracting steel wire rope line and a braking system with 2 pawls for immediate locking in case of fall. It includes an internal kinetics energy dissipating element.
A rescue winch can be activated after a fall to lift a worker for a safe rescue.

DIMENSIONS

REF.	H	L	E / E*	Weight	Length
NS15TS	420 mm	245 mm	203 / 298 mm	15 kg	15 m
NS20TS	500 mm	285 mm	206 / 301 mm	20 kg	20 m
NS30TS	500 mm	285 mm	206 / 301 mm	22 kg	30 m

E*: RESCUE WINCH OUT

ASSOCIATED PRODUCTS

Fixing plate
- NADPA15V2 (NS15TS) / NADPA20V2 (NS20/30TS)
- NIN2401 (NS15TS) / NIN2402 (NS20TS)