

serie

NEO020

REF.
NEO020.NE

**RETRACTABLE TYPE
FALL ARRESTER 2 M**



**TESTED TO BE USED IN
REVERSE POSITION**

MAX
140 KG

**MAXI USER
WEIGHT 140 KG**



**TESTED TO FALL
FACTOR 2**





TECHNICAL SPECIFICATIONS

- Tested to be use in reverse position
- Vertical and fall factor 2 use up to 140 kg
- Total length 2 m
- High density polyethylene webbing, wide 25mm (R>22kN)
- Aluminum housing
- Energy absorber with a polyamide and polyester tearing strap of 31 mm breadth wrapped with a protective pouch
- Arrest force < 600 daN
- Static resistance ≥ 15 kN
- Swivel anchor hook on top fitted with (M) or (A) connector
- Automatic swivel connector with fall indicator in anodized aluminum (K) or (X)
- Weight : 1,30 kg (NEO020.NEMK) - 1,65 kg (NEO020.NEMX)

DESCRIPTION

Lightweight and compact fall arrester fitted with a self-retracting high density polyethylene webbing lanyard. Compatible for a fall factor 2 using for a maximum load up to 140kg (user + equipment). The fall arrester can be used in reverse position, directly connected to the fall arrest attachment points of the harness. Compatible for a fall factor 2 use. The shock absorber is packaged in a protective pouch.

USE

Works on height with vertical fall hazards.

The **NEO020.NE** retractable type fall arrester is available in standard with the following steel or aluminum connectors :



NM16NS



NM20ALUB



swivel anchor side



NM26ELFA




NM28NET



shock absorber side

MINIMUM CLEARANCE AND FALL FACTORS

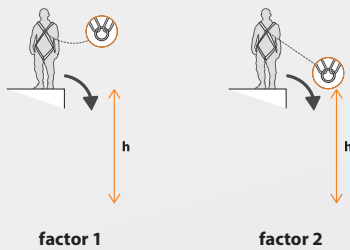

REFERENCES	LENGTH AT REST (without connector)	EXTENDED LENGTH (without connector)	MINIMUM CLEARANCE		
			Maxi user weight	F1	F2
NEO020.NEMK NEO020.NEAK	675 mm 680 mm	2000 mm	140 kg	≥ 2,70 m	≥ 5,90 m
NEO020.NEMX NEO020.NEAX	740 mm 745 mm				