


AKR'O® WIRE

REF.
NELIC



ANCHOR CABLE SLING

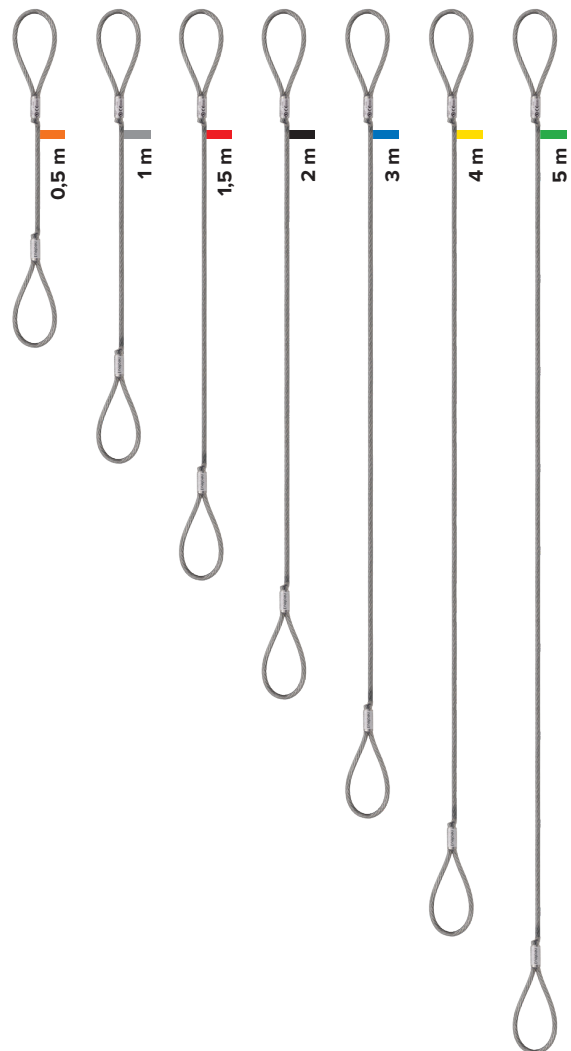

REGULATION

2016 / 425

CERTIFICATION

EN 795:2012-B
EN 354:2010
TS 16415:2013-B

¹ Only this compulsory annual inspection will validate the condition of the equipment and whether or not it should be kept in service. Refer to the instructions for use.
² In use according to EN795:2012 / TS16415:2013.



TECHNICAL SPECIFICATIONS

- 1 • Ø6.5mm galvanised steel cable with plastic sheath (R>30kN).
 - **Static resistance** depending to configuration of use (#1).
 - Color coding according to length.
 - **Certified for 2 users** (EN795-B / CEN/TS16415-B).
 - 2 • **Two large loops at ends.**
 - **Weight** : 290 g (NELIC10)
 - **Available in several standard lengths.**
- Other lengths available on request. (0,5 to 5m).*

DESCRIPTION

AKR'O® WIRE is a Ø6.5mm galvanised steel cable anchor sling with 2 large loops at the ends, offering maximum durability and safety thanks to the plastic sheath that protects it. Certified for use by 2 users in accordance with standard EN795-B, **AKR'O® WIRE** is also certified as a connection lanyard (EN 354) and can be used to restrain people at work and/or restrict movement.


USE

Working at height with risk of vertical falls.

The two large loops at the ends allow several configurations :

- directly on an anchor
- around an anchoring structure
- as a lark's head around an anchoring structure, then passing it through the other loop.

AKR'O® WIRE can be used as a mobile anchoring device (EN 795-B) or as a connecting lanyard (EN 354).

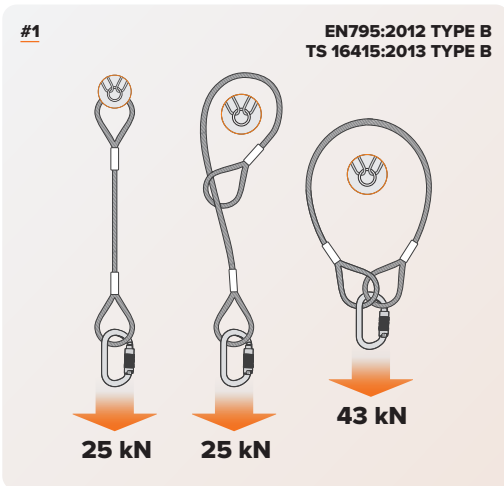

REFERENCES & INFORMATIONS

LENGTHS	50 cm	100 cm	150 cm	200 cm	300 cm	400 cm	500 cm
REFERENCES	NELIC05	NELIC10	NELIC15	NELIC20	NELIC30	NELIC40	NELIC50
COLOR CODE	Orange	Gray	Red	Black	Blue	Yellow	Green